


# UBL EBF

## UNDER BED LIFT & END OF BED FLAP



future automation

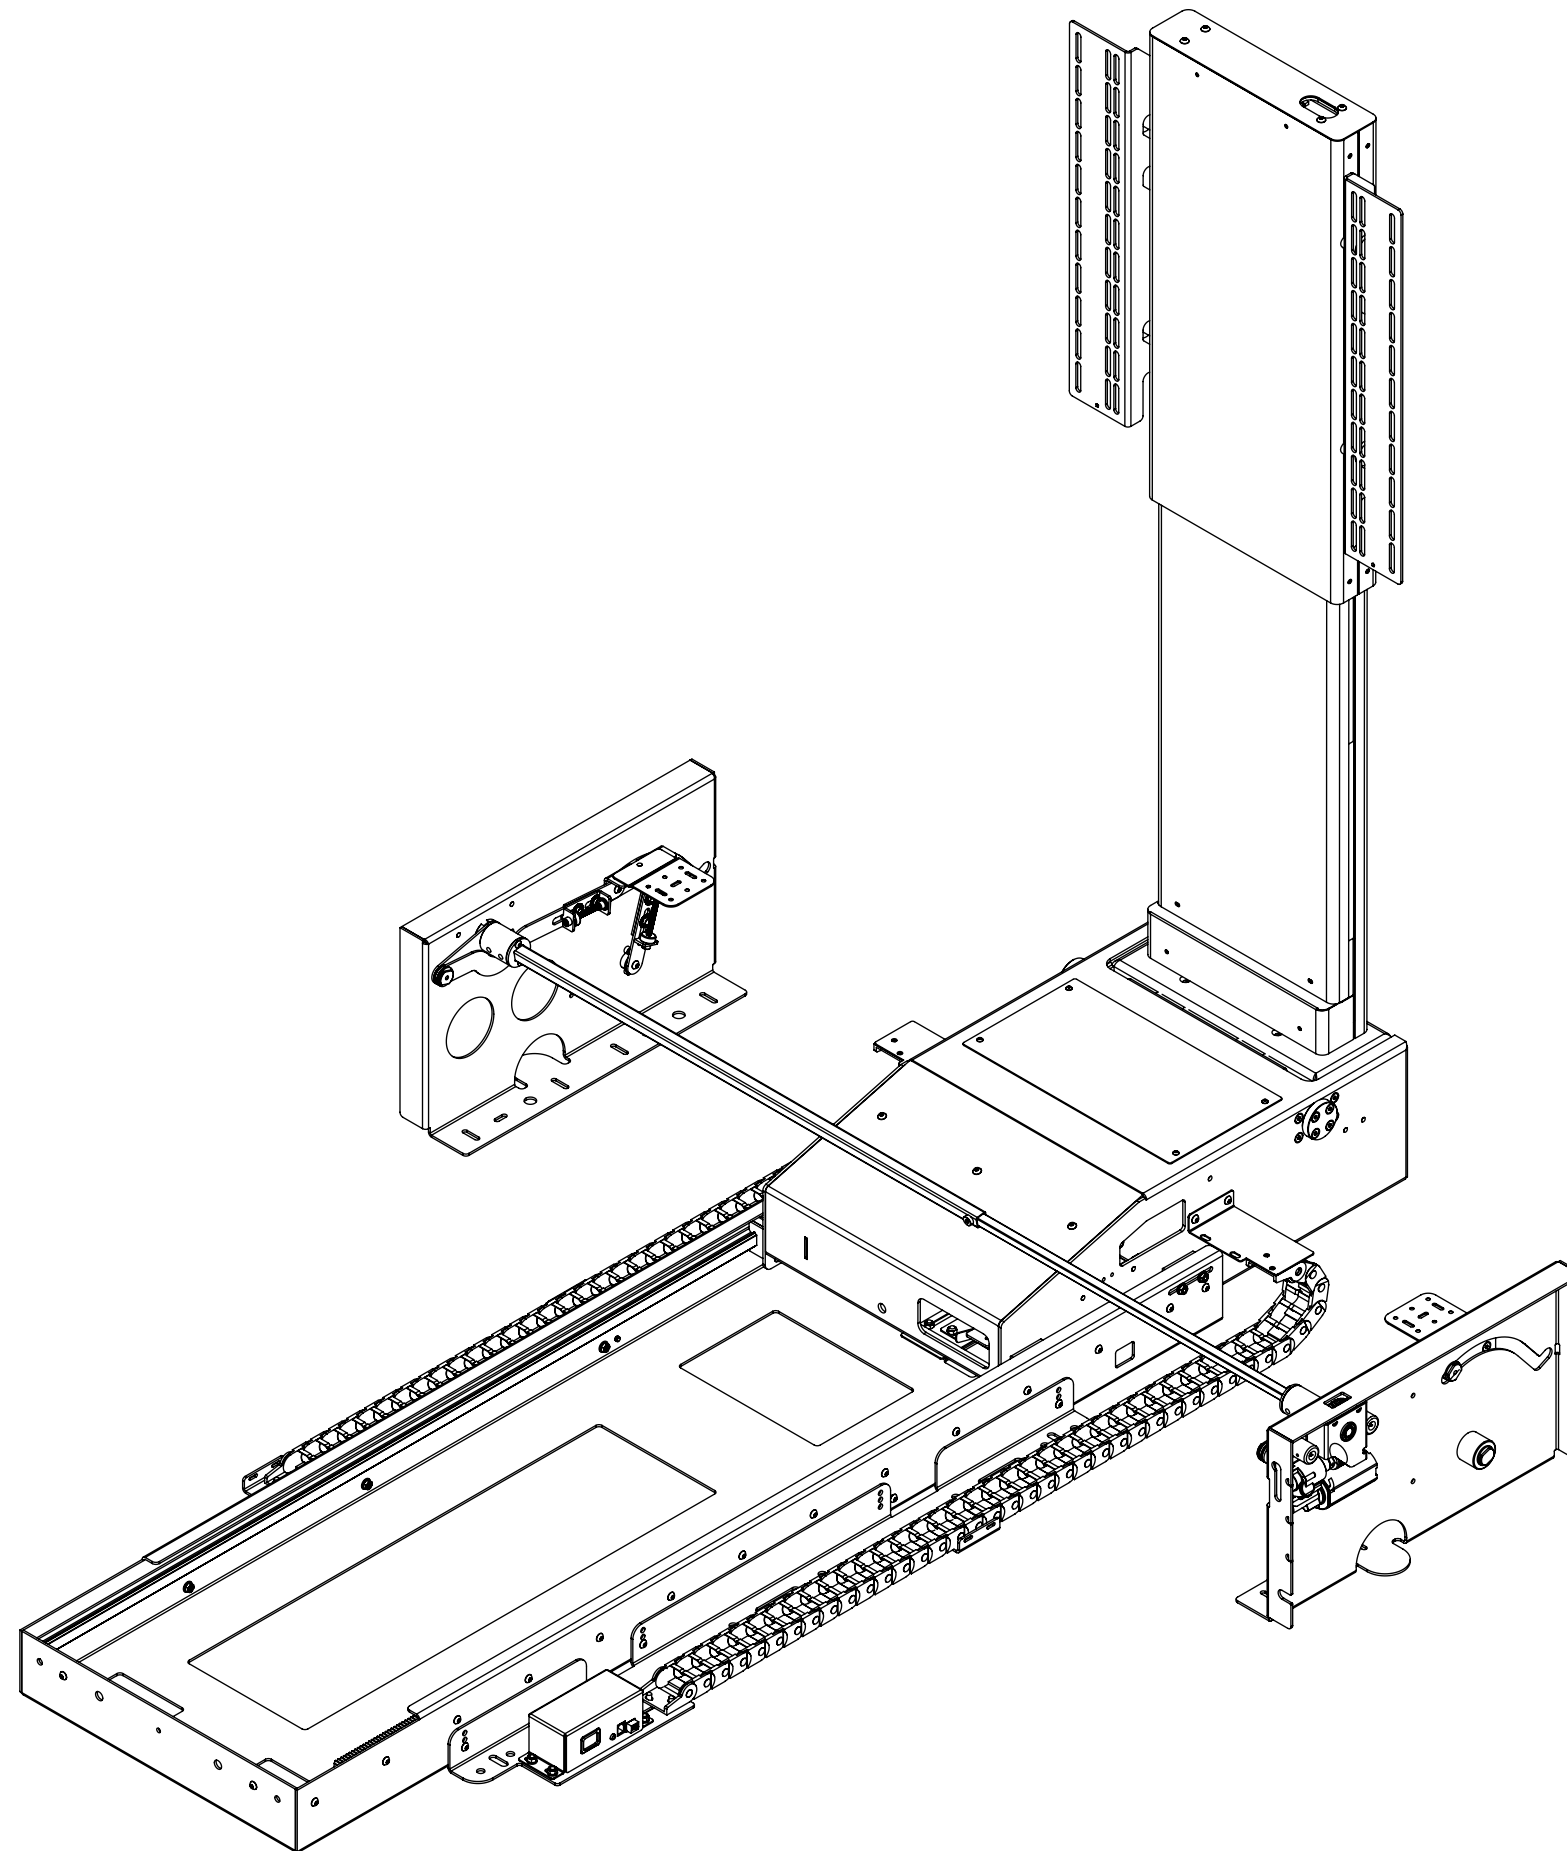

# UBL EBF

## UNDER BED LIFT & END OF BED FLAP

| SPECIFICATION               | MEASUREMENTS   |
|-----------------------------|--|
| Product Dimensions          | 1560mm (61.42") x 695mm (27.36") x 220mm (8.66")   |
| Maximum Screen Size         | 1250mm (49.21") x 800mm (31.49") x 90mm (2.75")  |
| Maximum Weight Capacity     | 40Kg (88lbs)   |
| Minimum Height Required     | 320mm (12.59")   |
| Minimum Length Required     | 1800mm (70.86")  |
| Product Weight              | 85Kg (187lbs)  |
| Packaging Dimensions        | 1700mm (66.92") x 1100 (43.30") x 500mm (19.68")   |
| Shipping Weight             | 150Kg (331lbs)   |
| Movement Type               | Motorised  |
| Power Supply Required       | 110V - 240V AC   |
| Power Consumption Max.      | 100W   |
| Power Consumption Standby   | 1.5W   |
|                             |  |
| Mounting Patterns Supported | VESA 400, 300, 200 W x 400, 300, 200 H   |
| Control Options             | IR Remote, RS232, Contact Closure  |
| Product Options / Features  | Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes, Marine suitable version |
| Package Contents            | Mechanism, IR remote control   |
| Marine Suitable             | No   |

# UBL EBF

## UNDER BED LIFT & END OF BED FLAP

### Design Highlights

Sophisticated electronics allow for favourite viewing height to be programmed via the IR remote control.

The electric flap retracts in under the bed. The Under Bed Lift (UBL) mechanism is then activated to reveal the screen.

This method of flap movement gives the neatest possible look as there is no flap panel left visible once the screen is in the viewing position.





Mechanism allows bottom of screen to be elevated up to 950mm [37.5"] above the floor.

All the power and signal cables for screen and mechanism can be concealed within the mechanism.

Super quiet and smooth action from under bed to maximum movement. Standard mechanism screen mount suitable for VESA 400x400, 400x300, 300x300, and 200x200 mounting.

An advance control system allows the lift mechanism to be easily controlled via home automation systems such as Crestron and AMX. Two way communication is also possible via RS232.

Many mounting options available for Loewe and Bang & Olufsen screens.

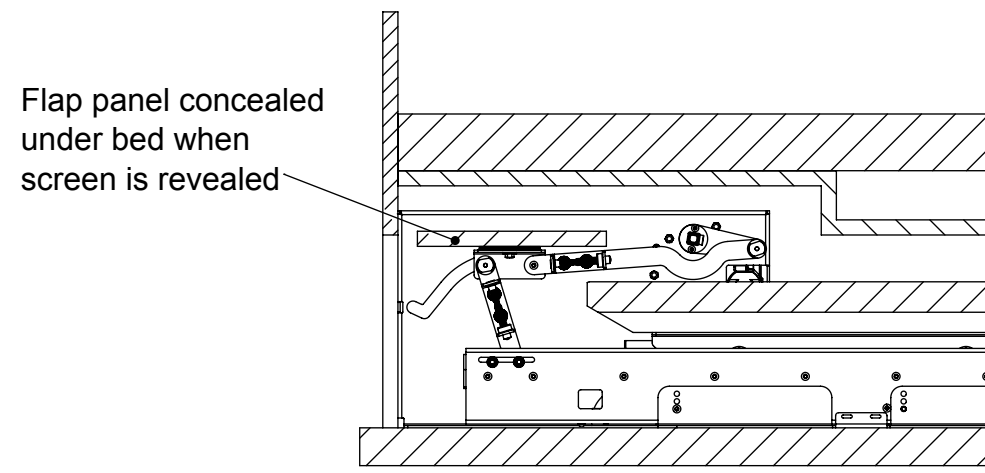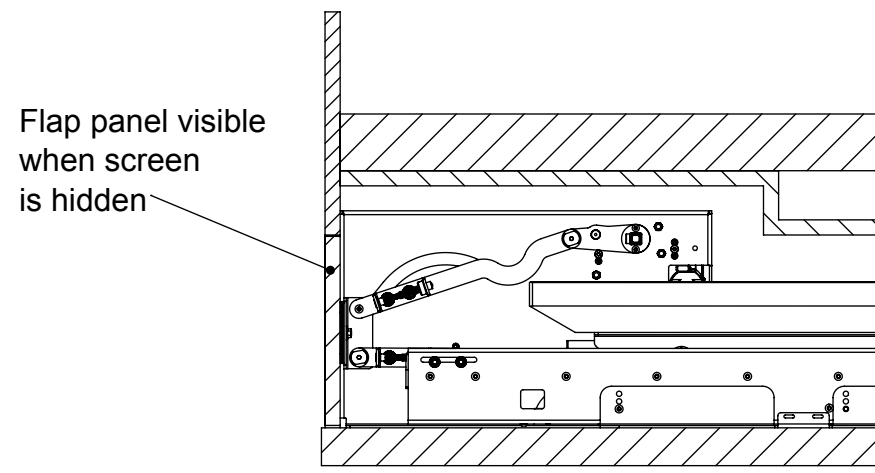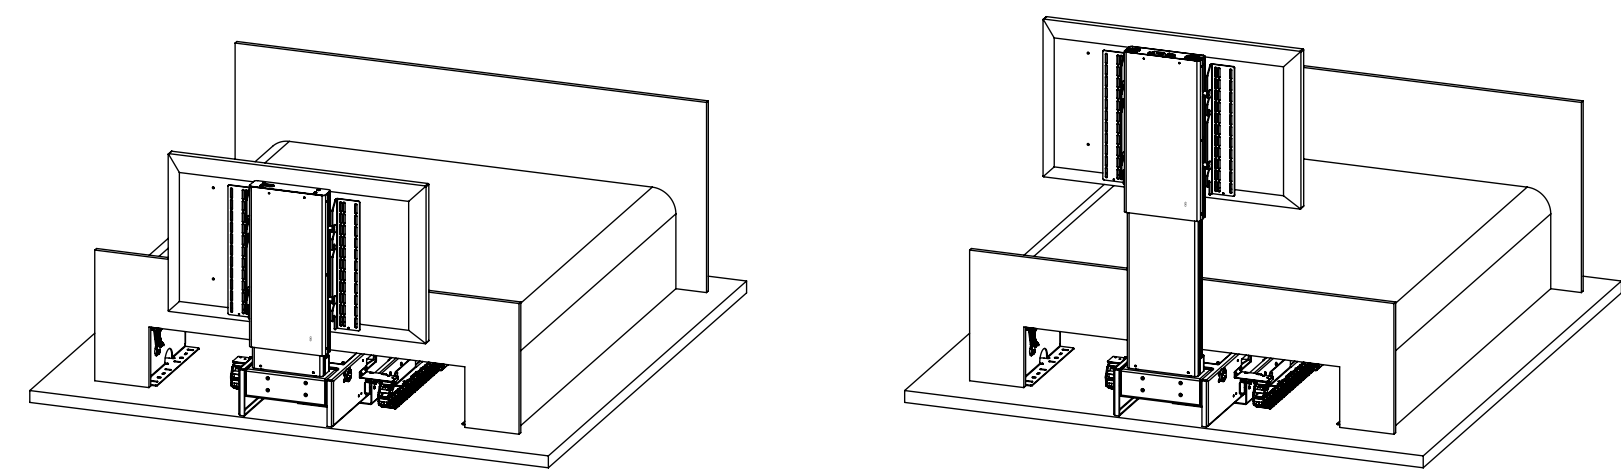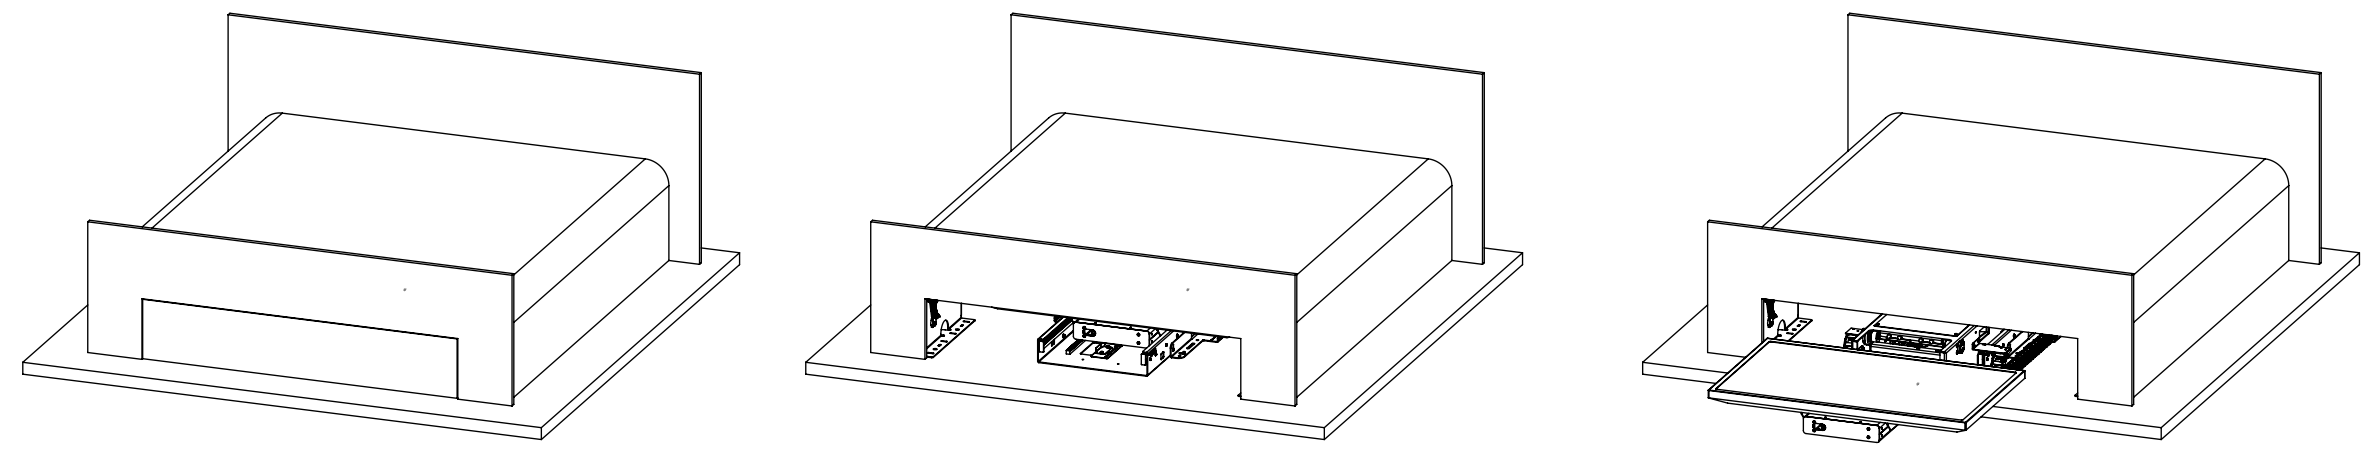

# UBL EBF


## UNDER BED LIFT & END OF BED FLAP

### Flap Details

End of Bed Flap panel should be made from wood.

Flap panel needs to be screwed to flap attachments brackets at each side.

Maximum flap panel weight 6Kg [13lb].

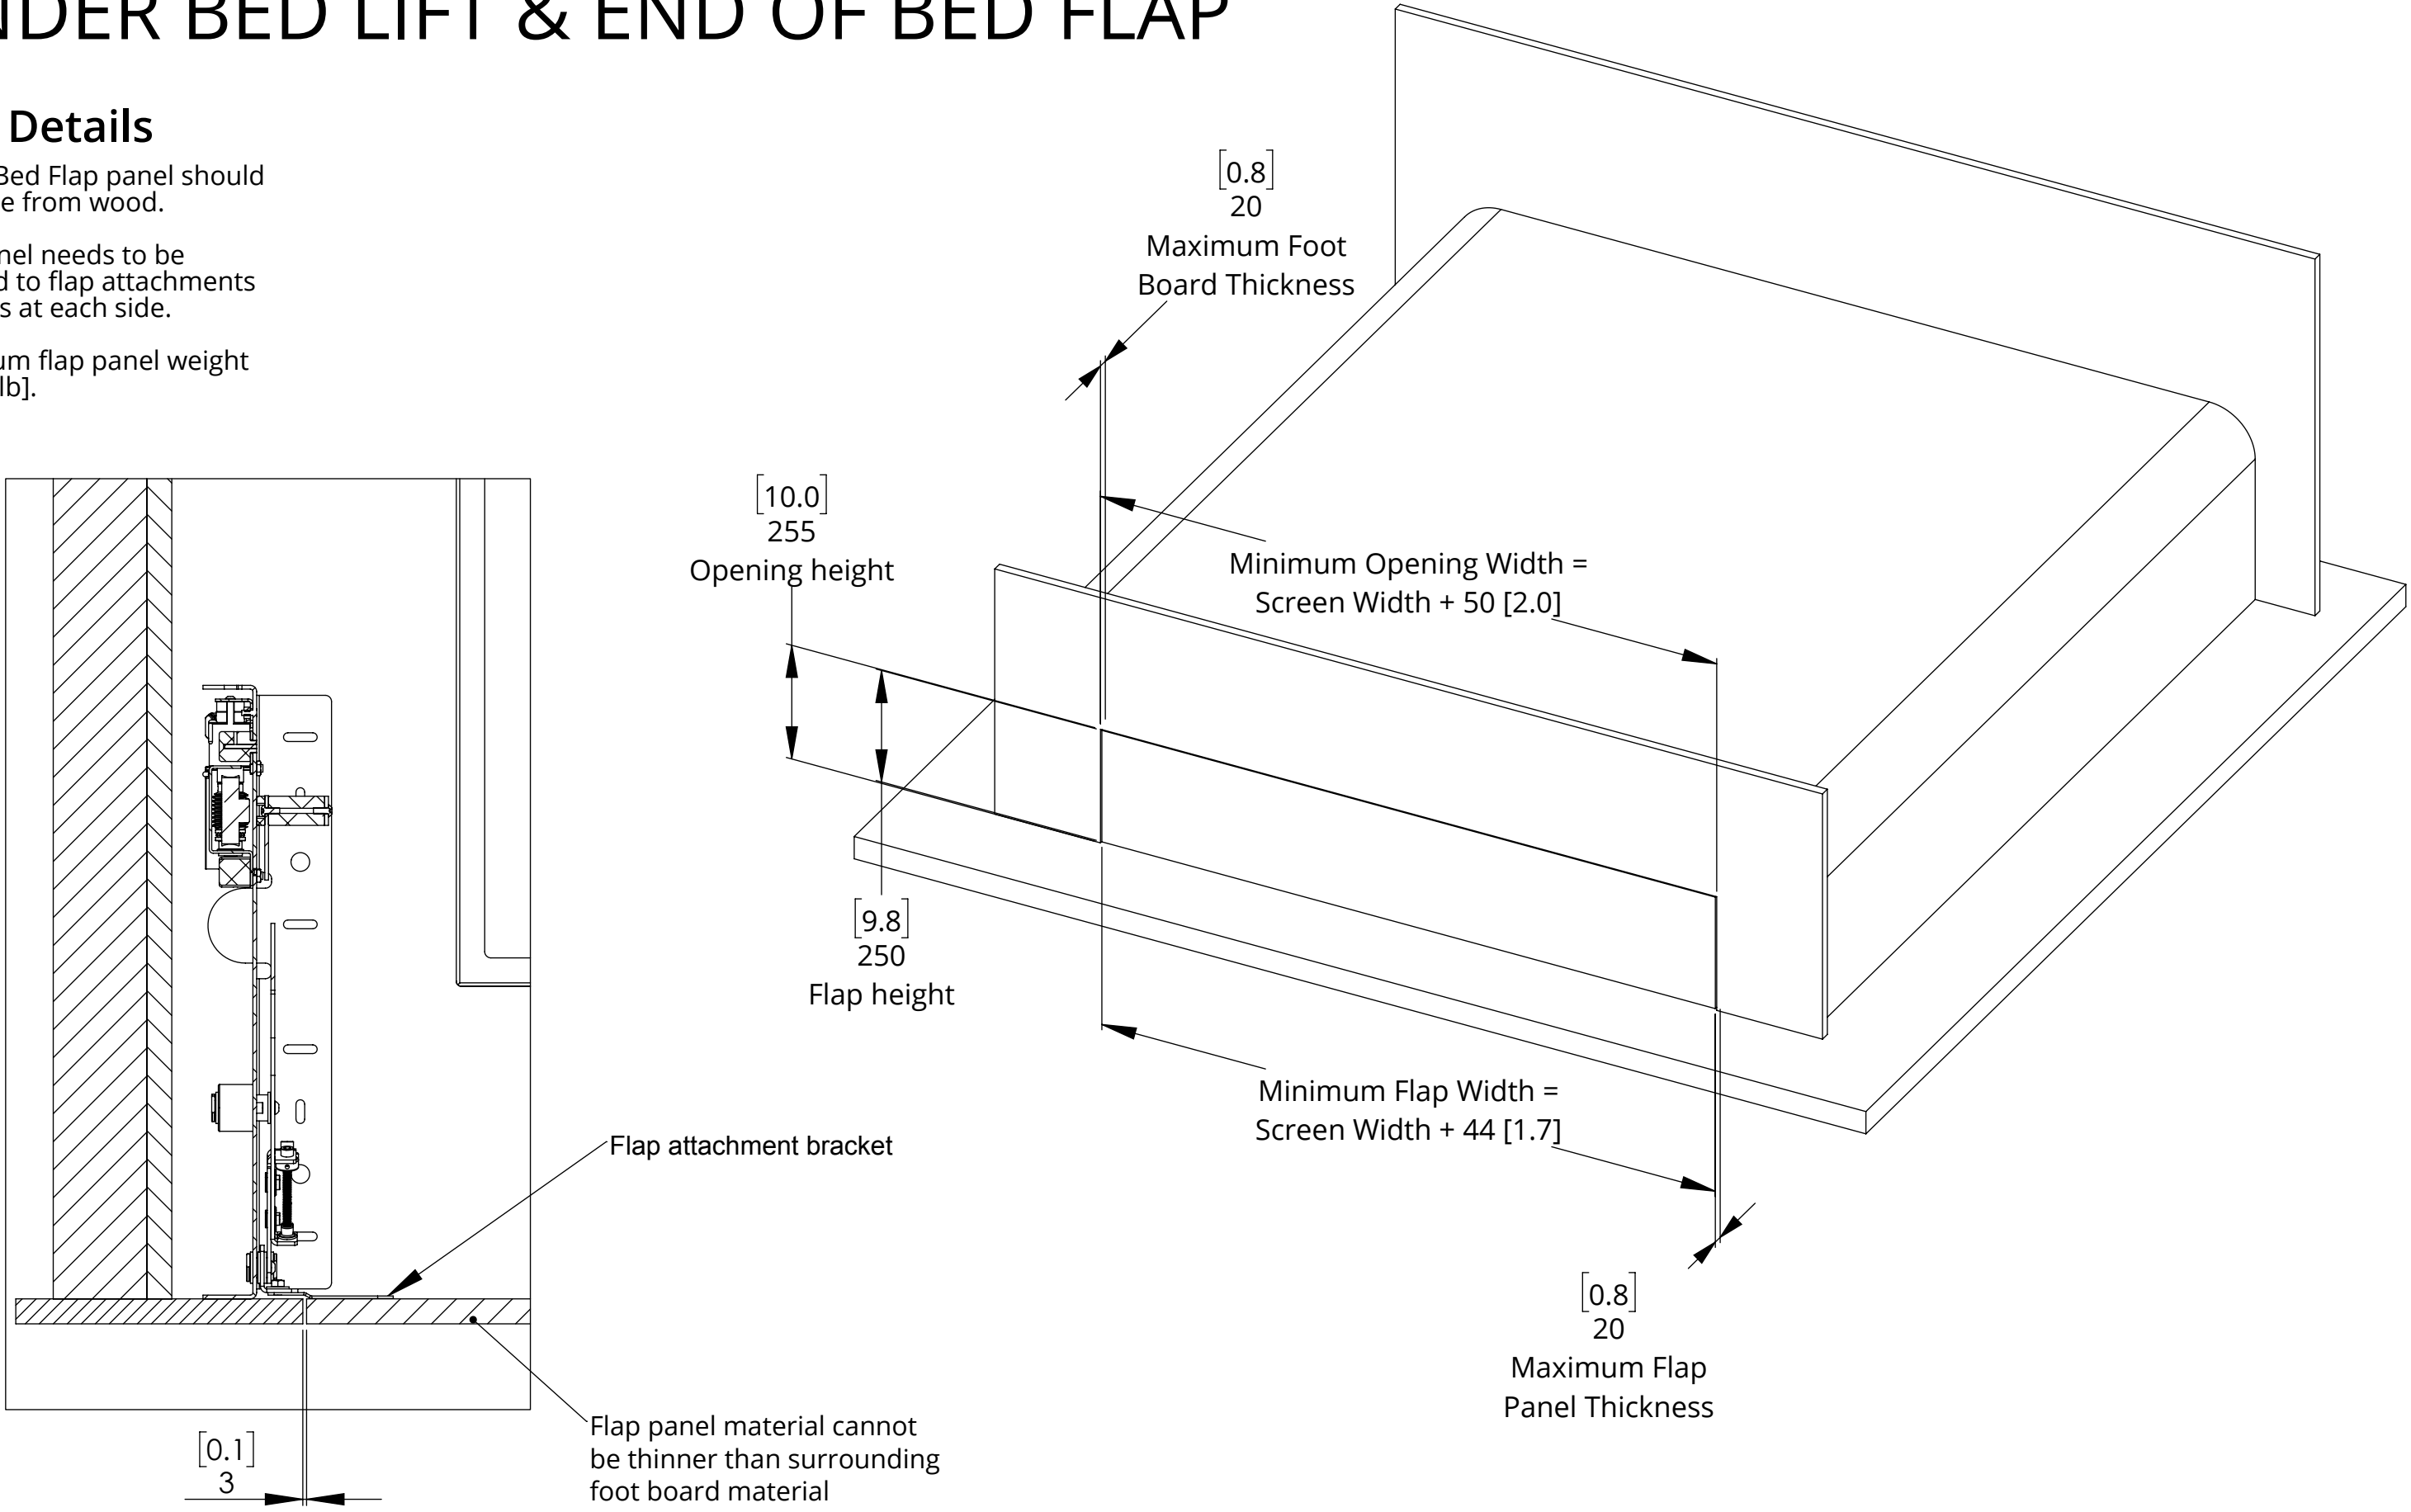

# UBL EBF


## UNDER BED LIFT & END OF BED FLAP

### End of Bed Space Details

At the end of the bed there needs to be enough space for the mechanism to extend from under the bed.

There needs to be a minimum of 'screen height + 12" / 305mm' at the end of the bed.


If the screen is being biased high on the screen mount to achieve even more elevation, then this end of bed space will need to be increased.

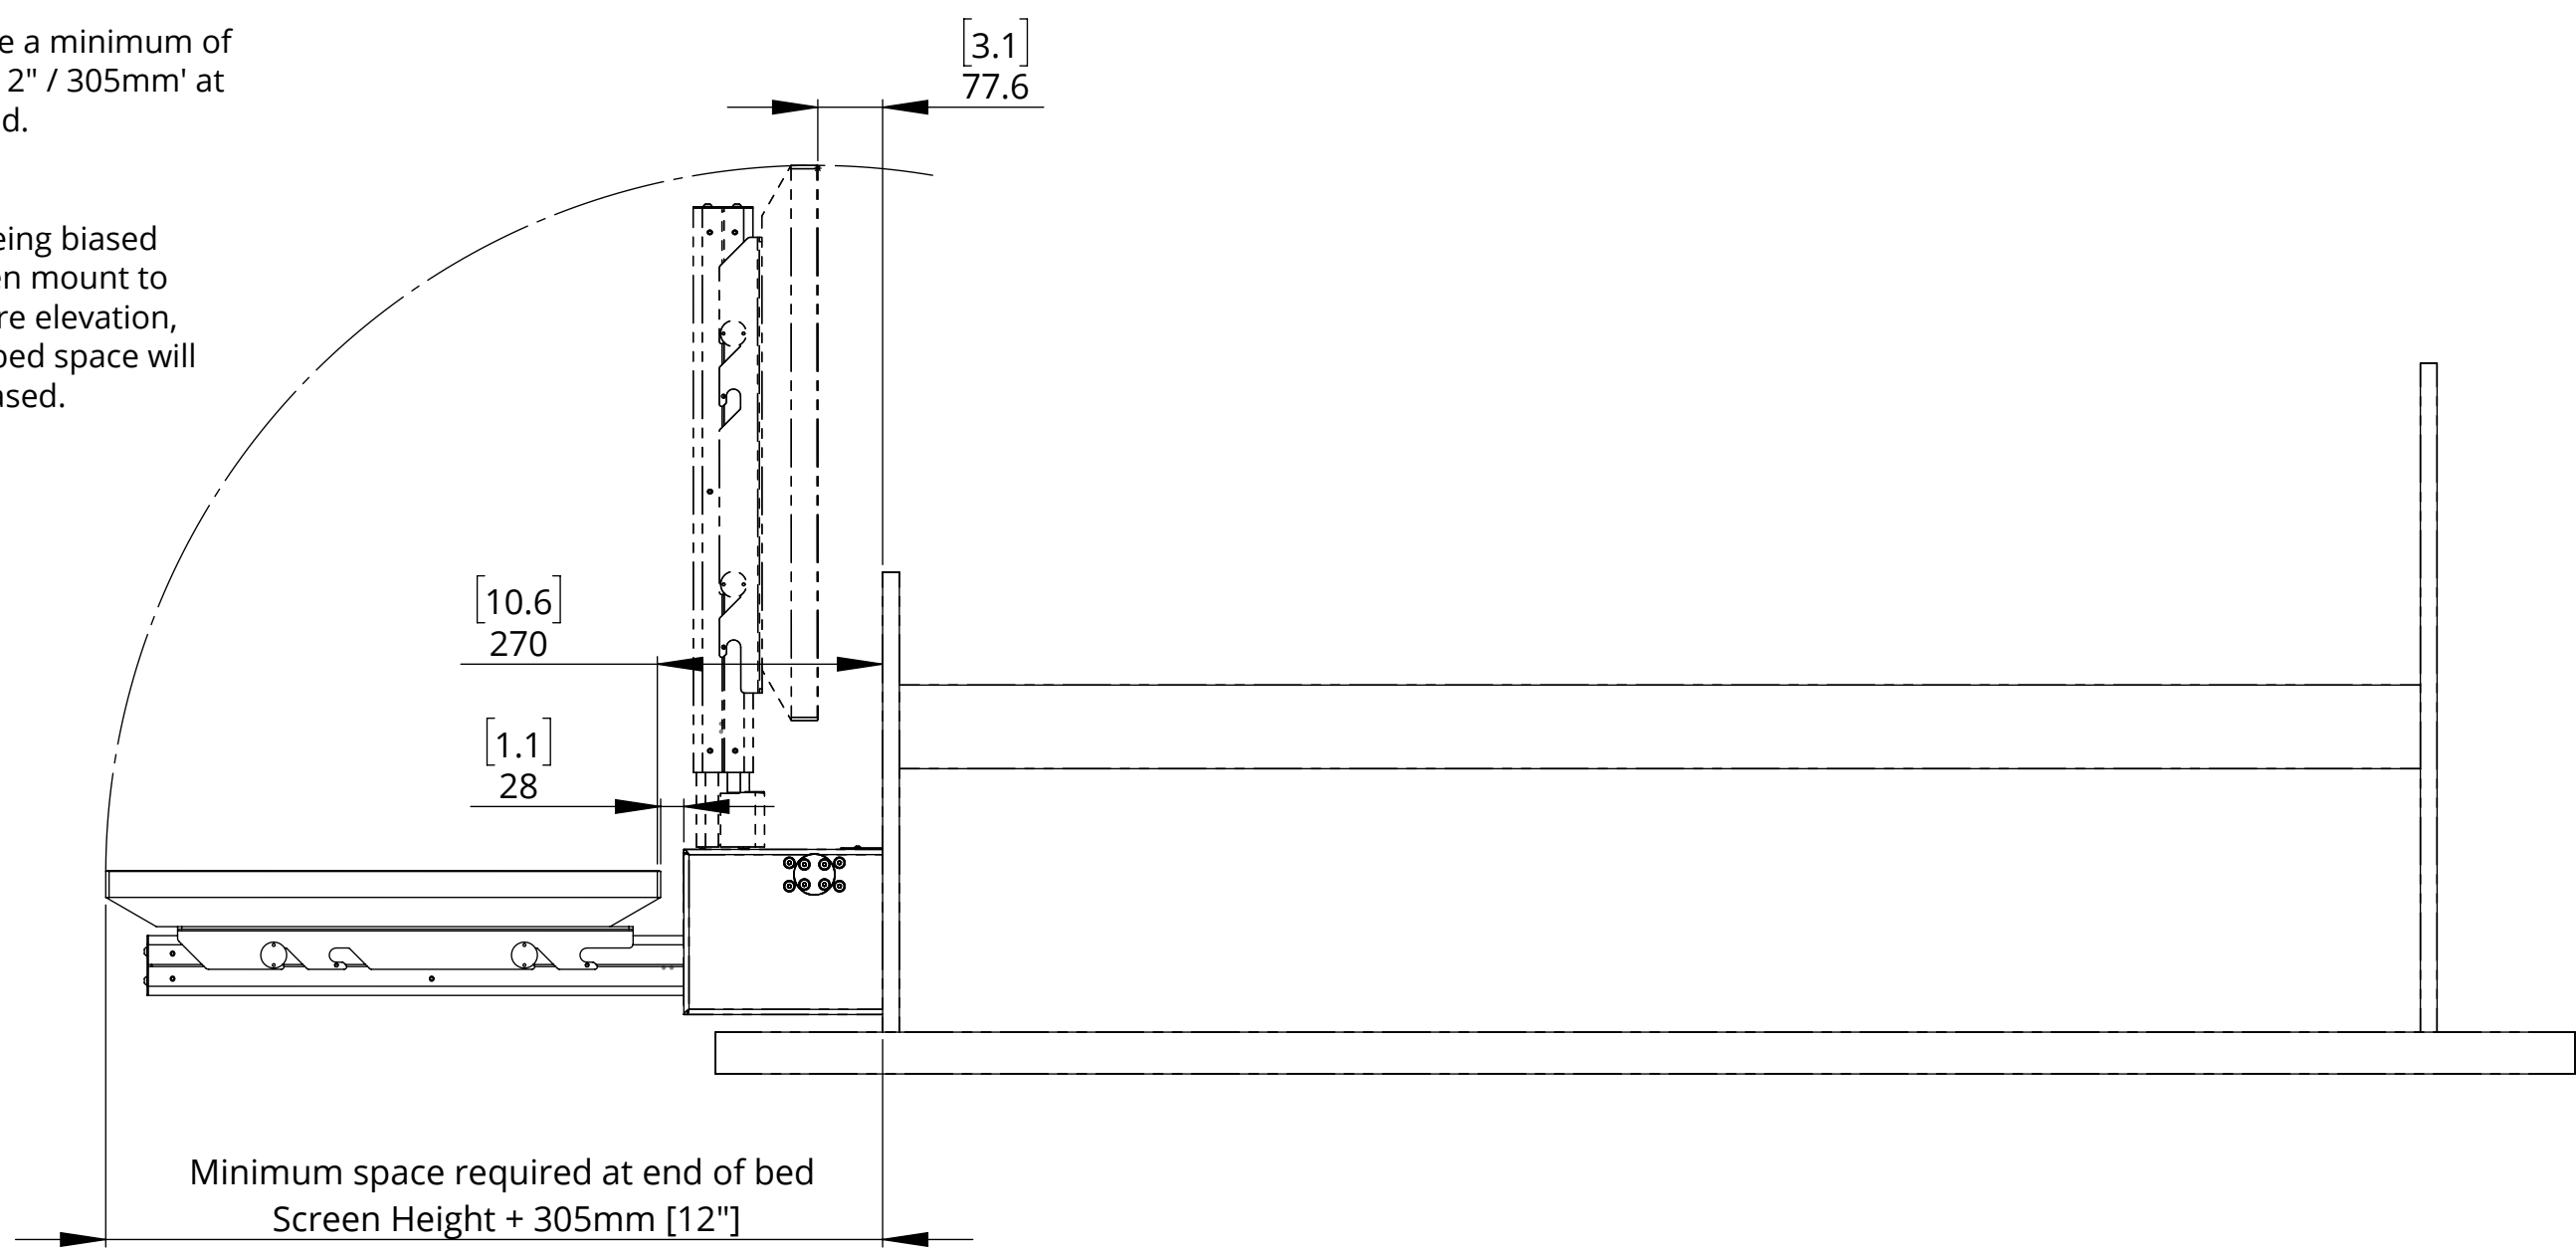

# UBL EBF

## UNDER BED LIFT & END OF BED FLAP


### Telescope Elevation Details

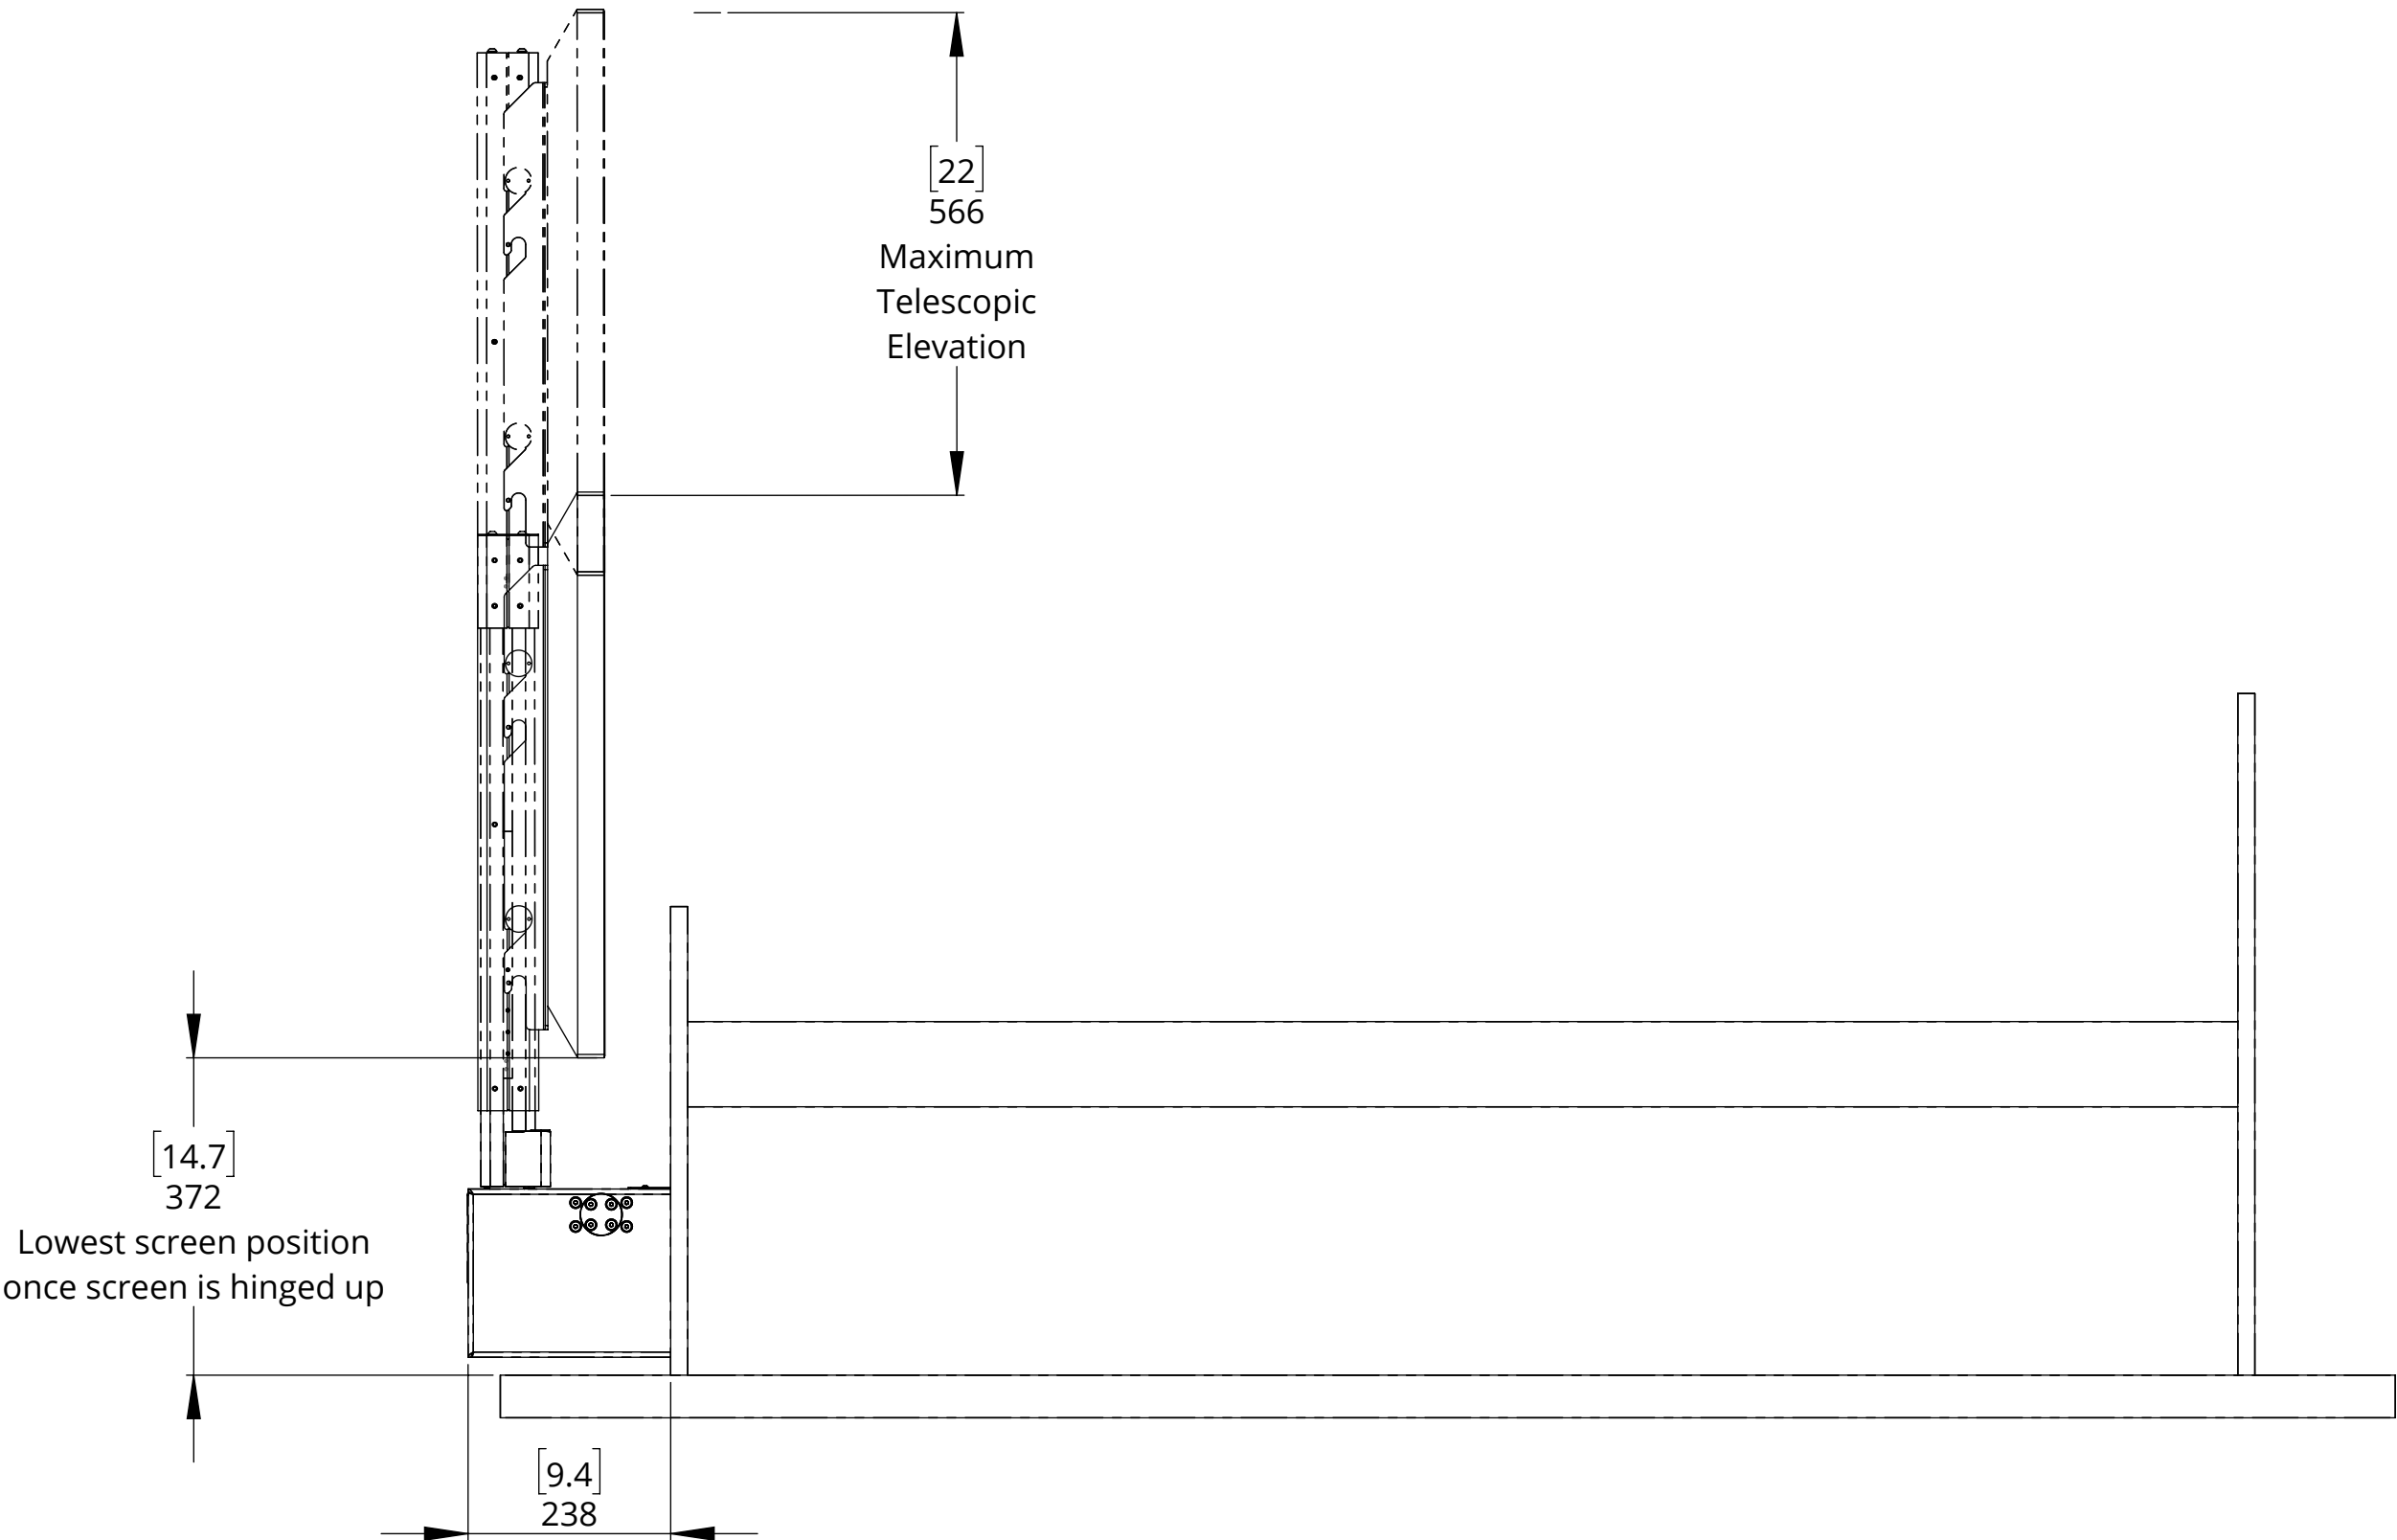

# UBL EBF

## UNDER BED LIFT & END OF BED FLAP

### Under Bed Space Details

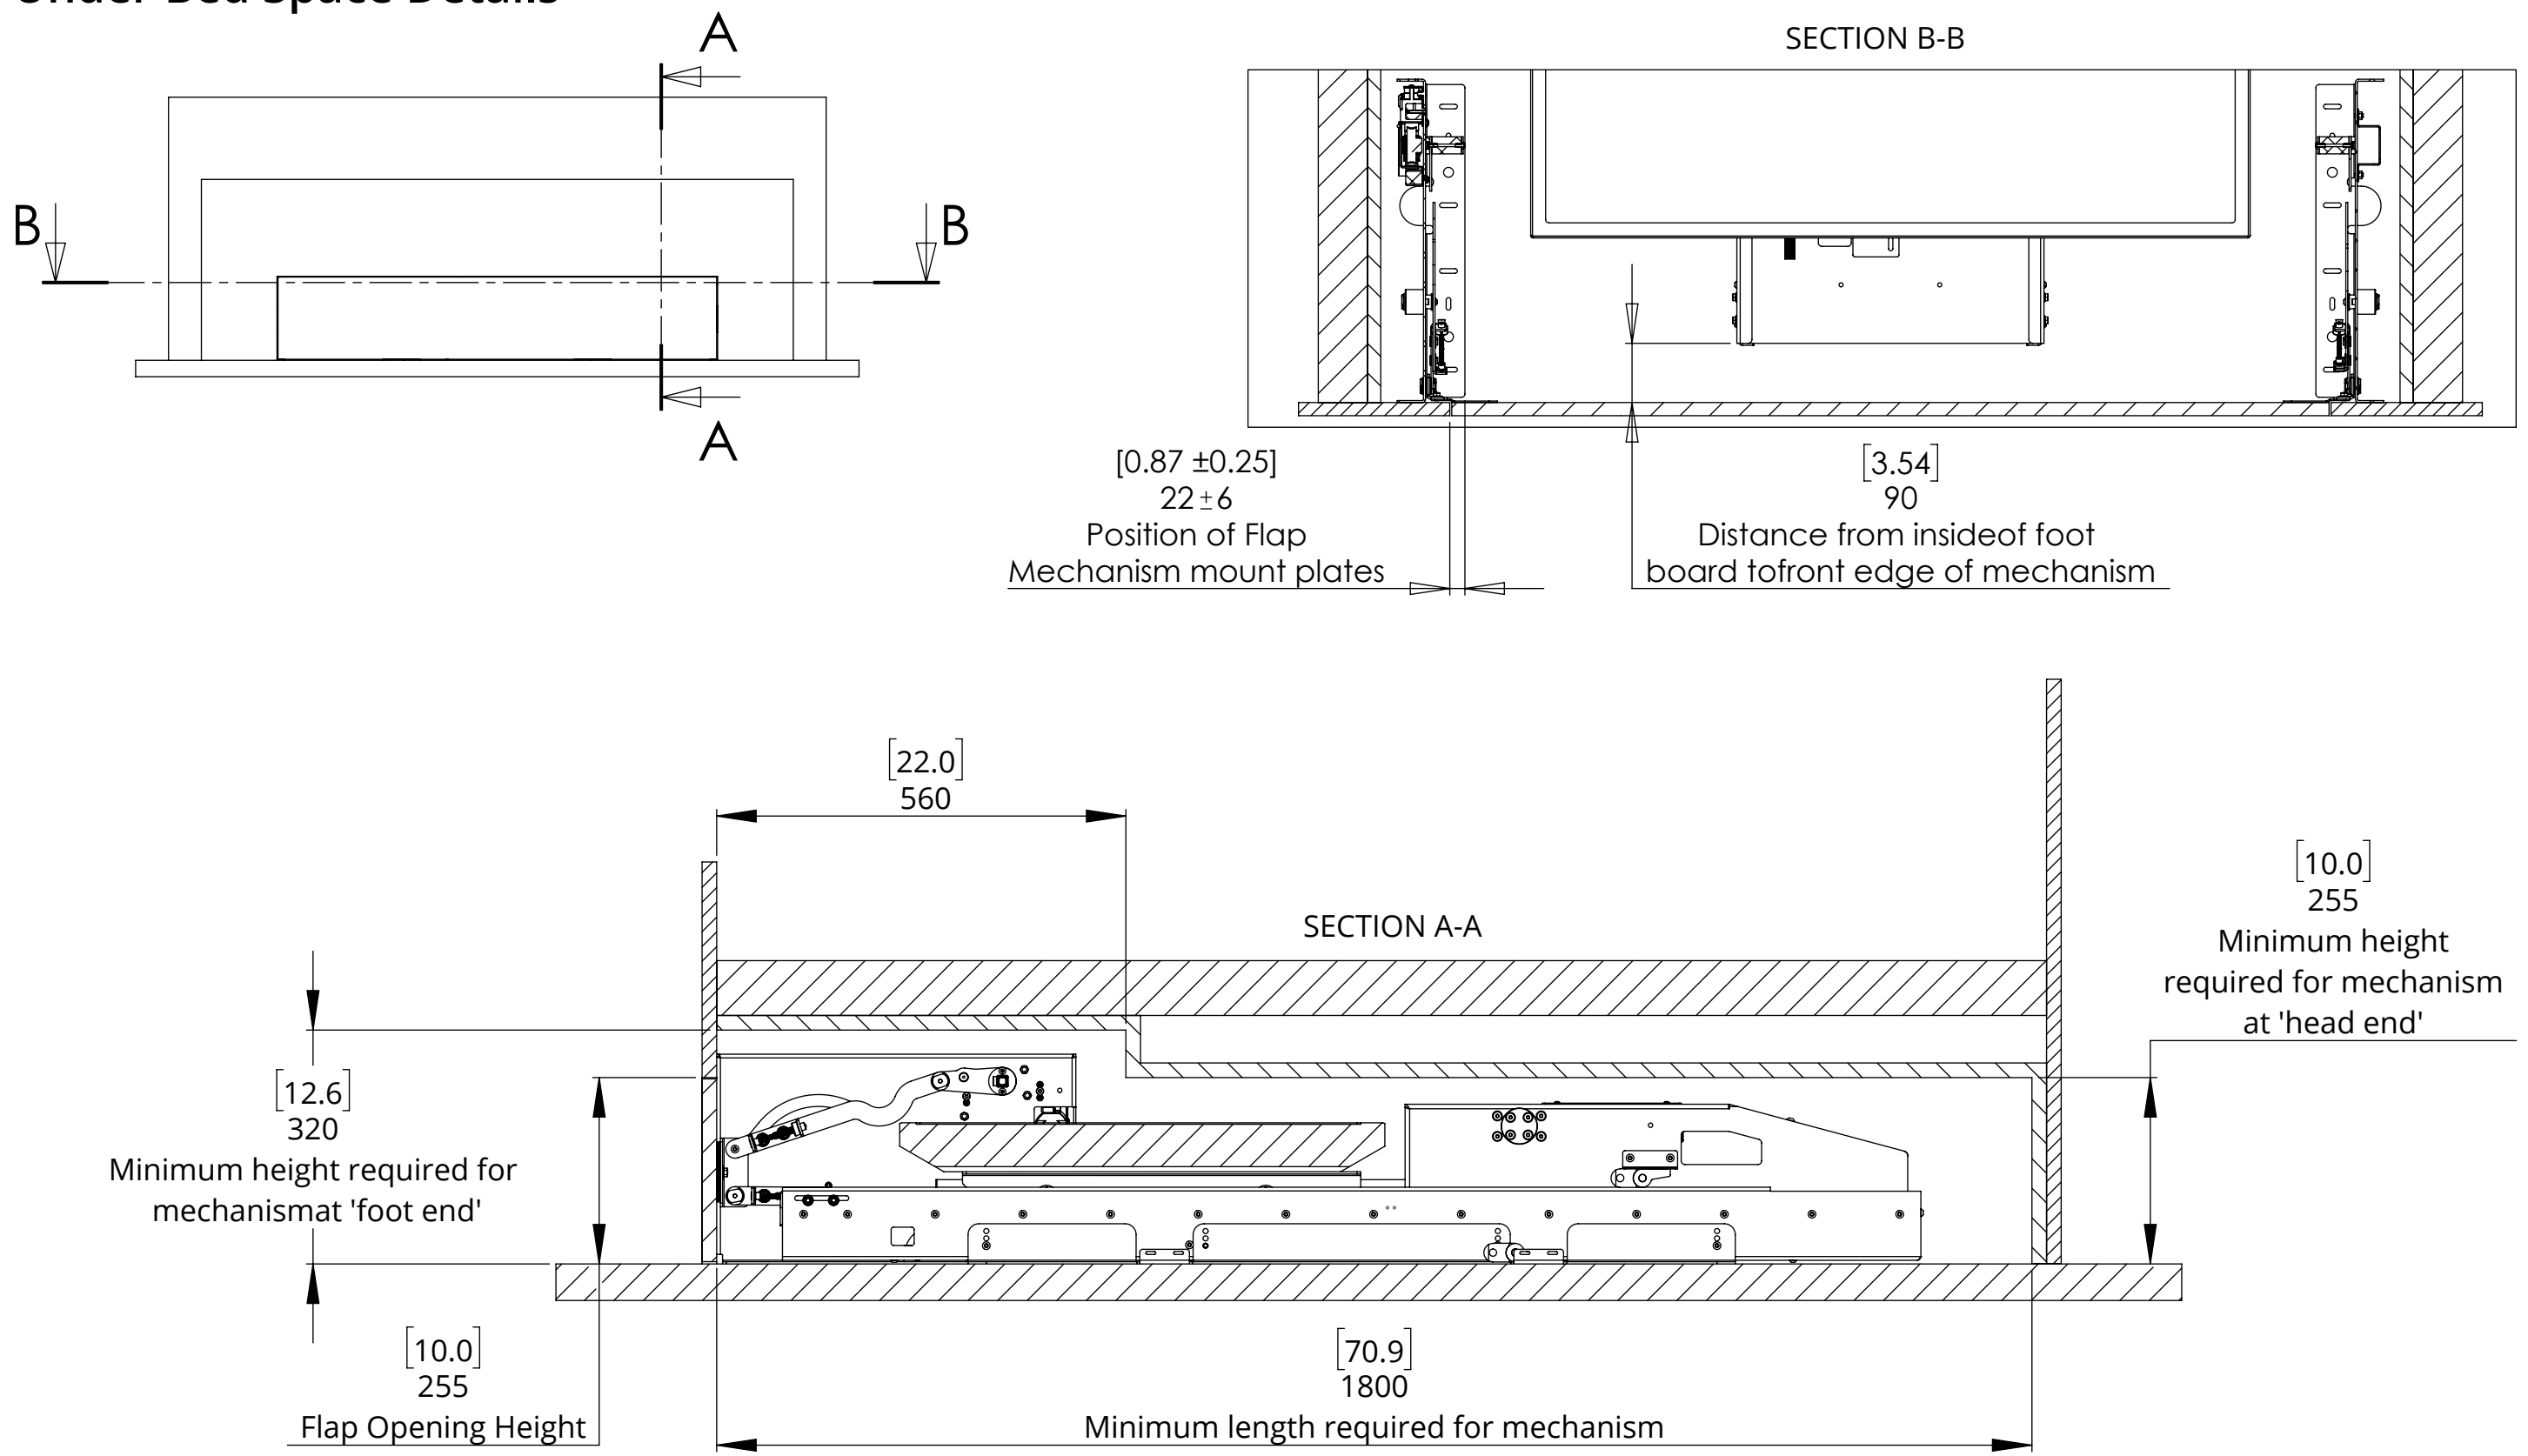

# UBL EBF

## UNDER BED LIFT & END OF BED FLAP


### Fixing Location Details

Areas outlined in red show areas where fixings need to be made to the floor below.

These areas should ideally be wooden surfaces so that the mechanism components can be screwed down in place.

For instances where the mechanism can't be attached to the floor a rear wall fixing can be provided

These areas also need access from above in order to get the fixings in place.

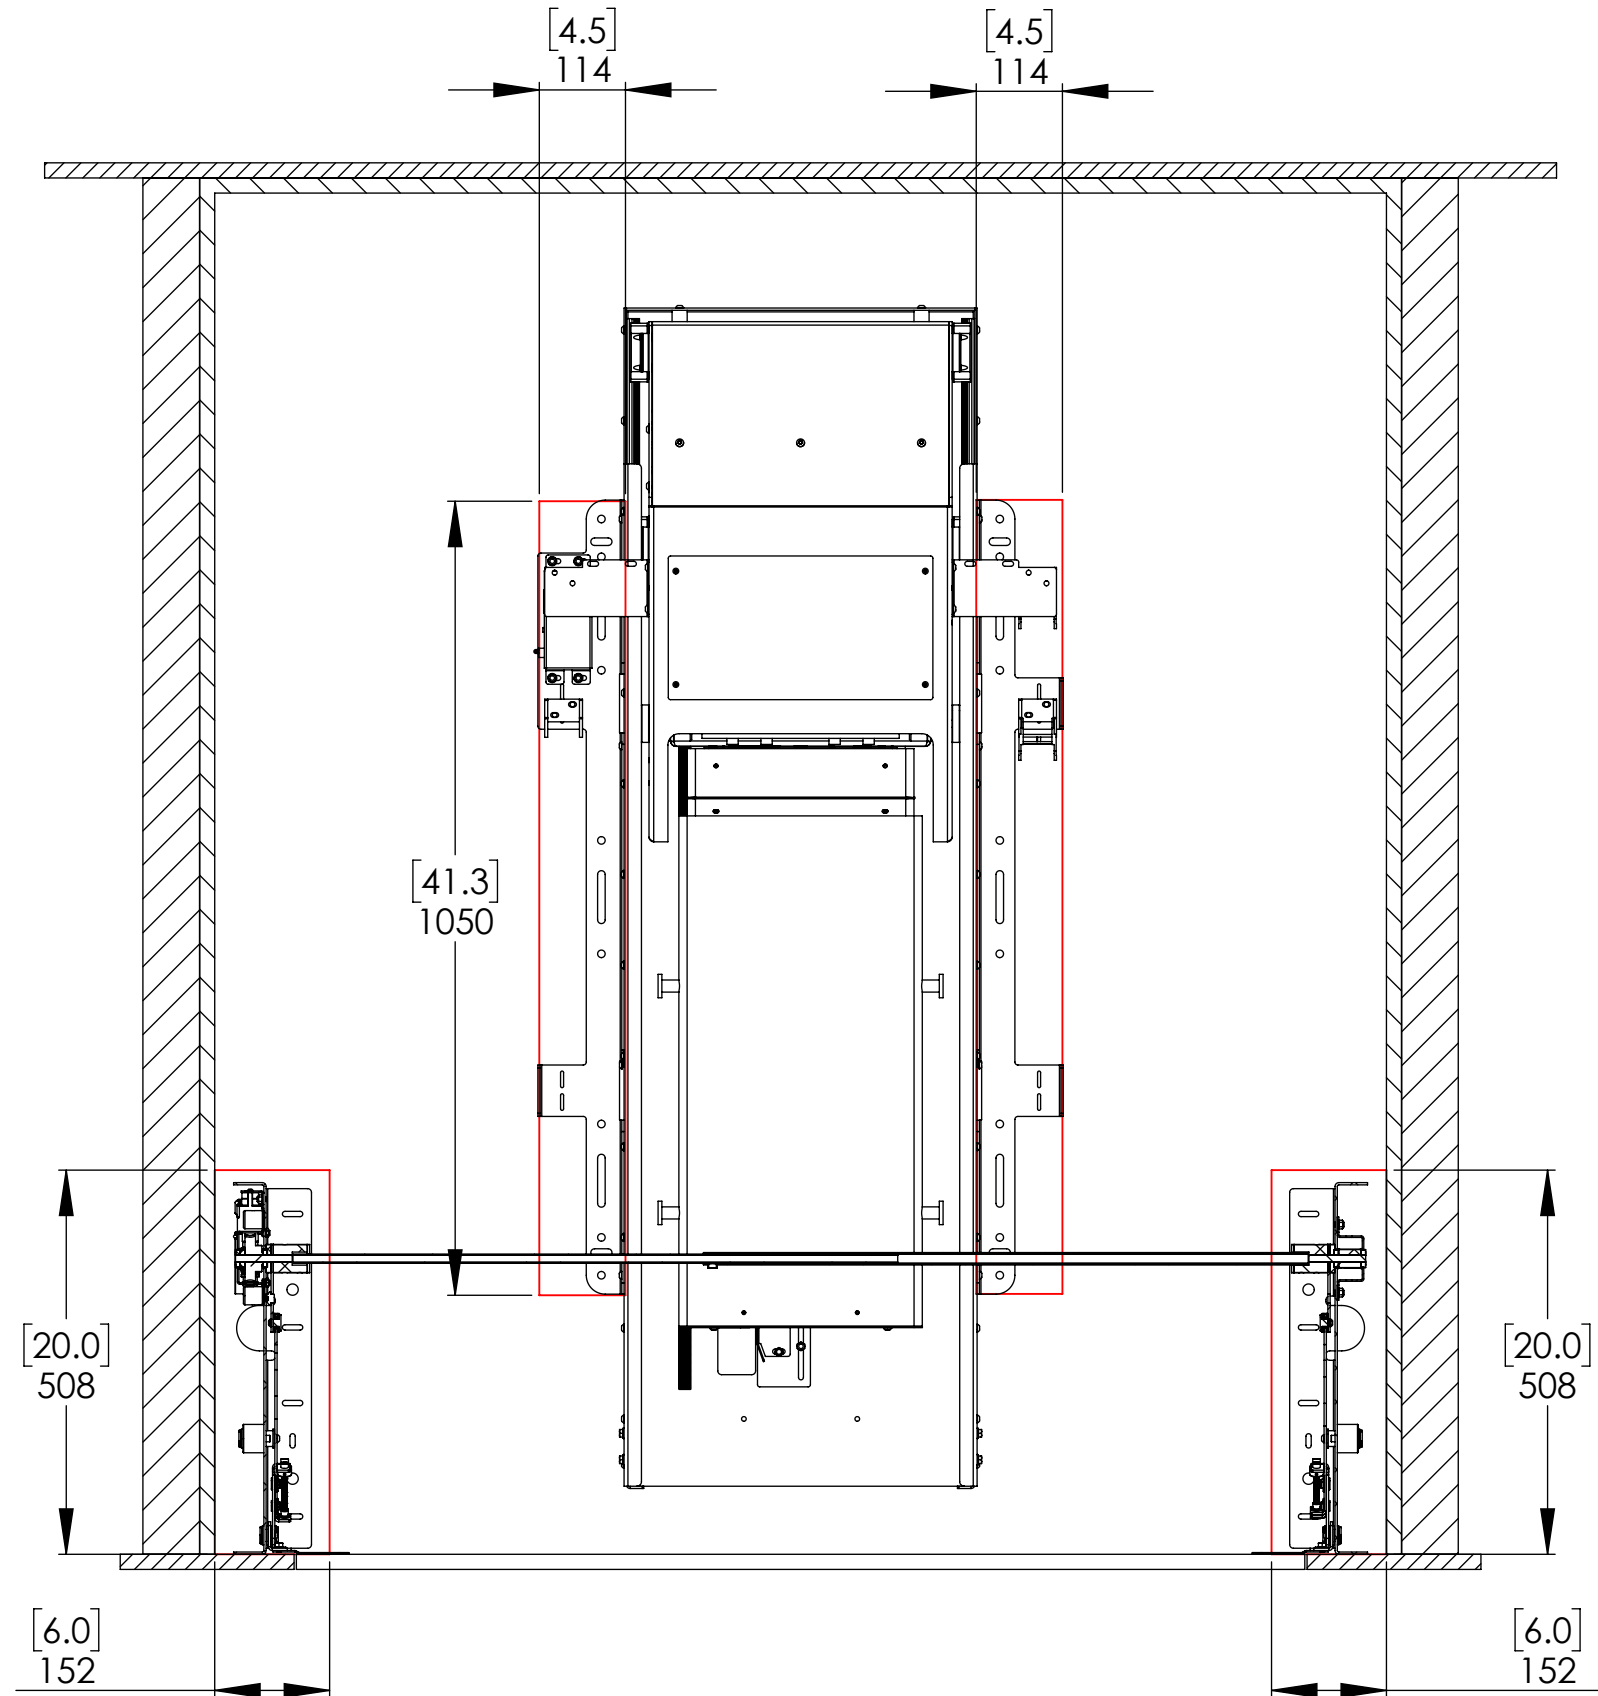






# UBL EBF

## UNDER BED LIFT & END OF BED FLAP


### Cable Managment

Detail A shows the hole in which the end customers cabling will enter the mechanism after being passed through the cable management track.

Detail B shows the where the mains power, IR and ethernet cables will need to be inserted.

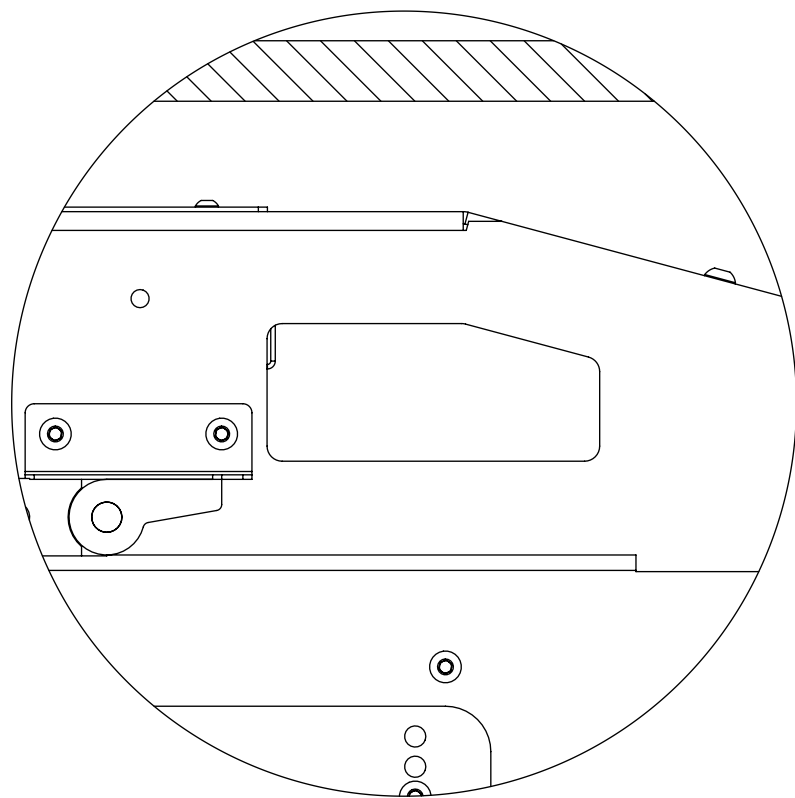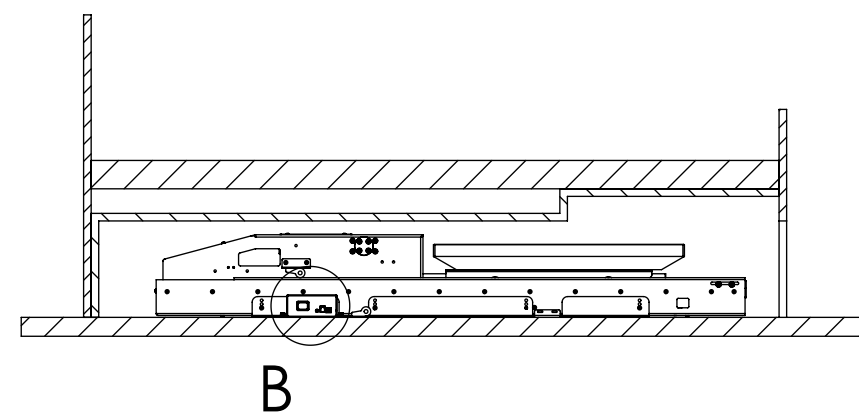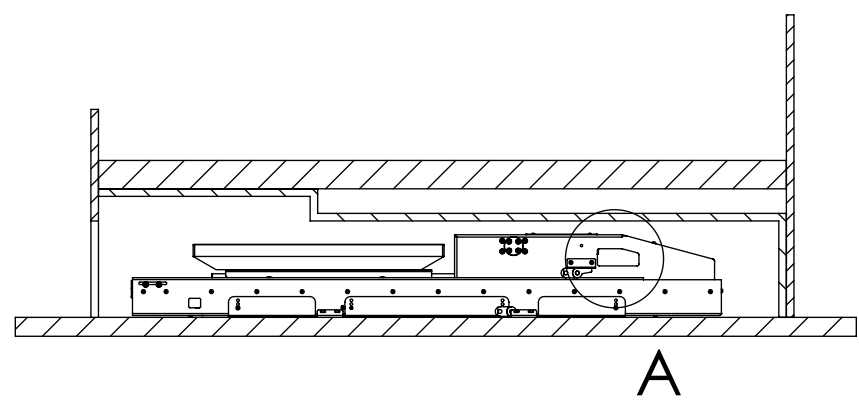

DETAIL A  
SCALE 1 : 2.5

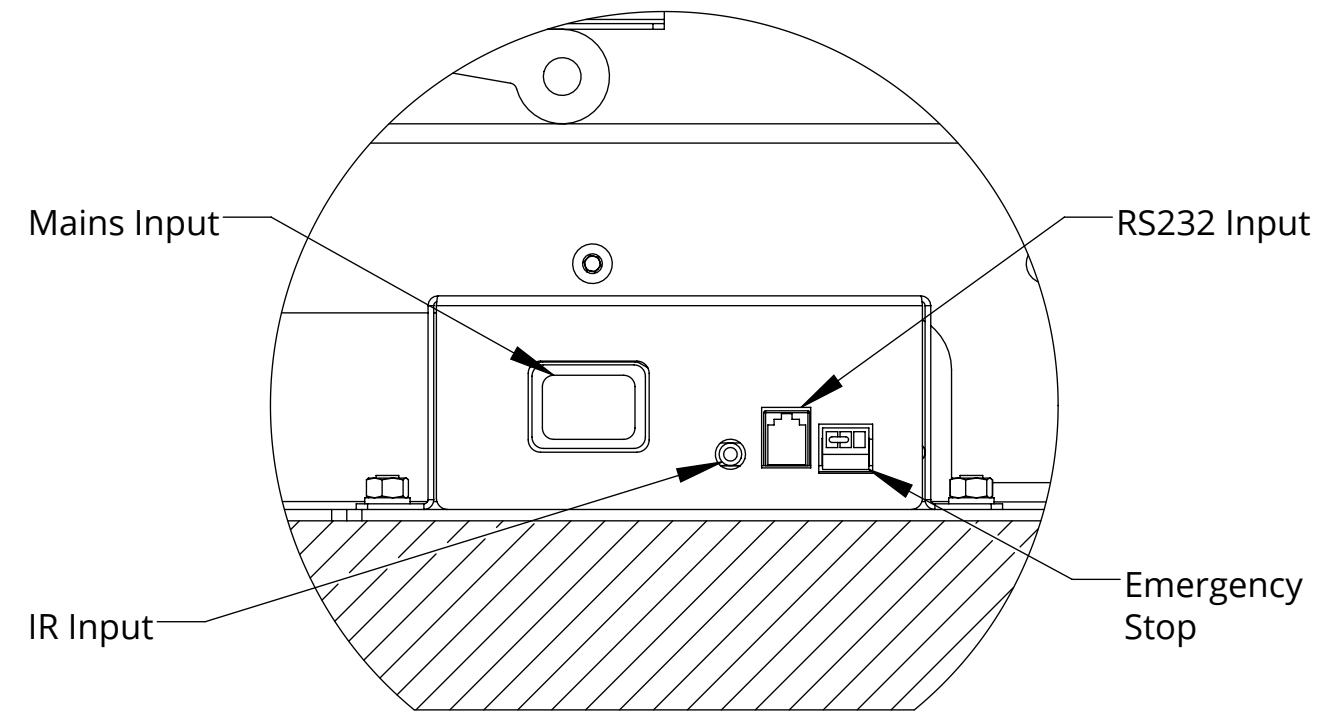

DETAIL B  
SCALE 1 : 2